




Thijs Talenstraat 1
NL-7913 ZX Hollandscheveld
Tel.: + 31 (0)528 34 28 92
Fax.: + 31 (0)528 34 28 93
site: www.pneumatic.nl
e-mail: info@pneumatic.nl

Postbus 14
NL-7913 ZG Hollandscheveld
VAT/BTW nr.: NL8158.43.859.B01
Bankrek.nr.: 31.66.09.072
IBAN nr.: NL89 RABO 0316609072
Swift: RABONL 2U

VV-200 stands for a food industry venturi, that's produced by ICH. The venturi gives a medium vacuum level, of 60% (at ~ 5bar).

The venturi is made from Pom-C (delrin), this makes the venturi completely natural to the handled product, it also doesn't oxidise. This ensures that there is no contamination of your product.

There are no moving parts in the venturi, this makes it very reliable and also gives it a high durability

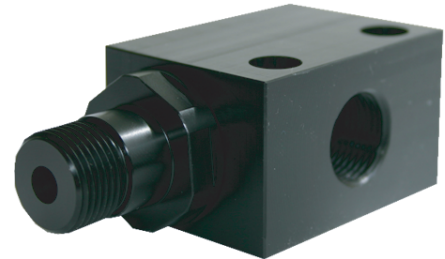

Article code:	VV-200
Vacuum level:	60 %
Vacuum flow:	80 NL/min
Air consumption:	110 NL/min
Vacuum port:	G3/8(female)
Pressure port:	G1/4(female)
Exhaust port:	G3/8(male)
Dimensions:	77*30*37 (mm)
Material body:	Pom-C (black)
Material jetpipe & nozzle:	Pom-C (black)

